

6 DOORWAYS

It is important that the Profloor Micro Deck 17 panels do not contact any part of the wall structure, including doorframes and similar. Flanking/Support strip should be used at all perimeters to ensure this does not occur.

In a refurbishment situation where door facings are already in position, it may be simpler to cut 25mm off the bottom of the facings prior to installation. This will allow the Profloor Micro Deck 17 panel to slide underneath the existing facing. See Fig. 7.

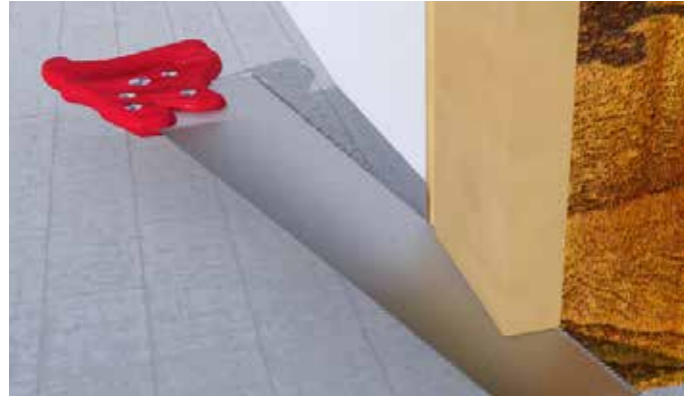


Fig. 7

Where Profloor Micro Deck 17 panels are butted together and no tongue & groove joint is present, for example at internal door thresholds, a run of Profloor Flanking/Support strip must be attached to the edge of each board. Mechanical fixings may be used through the closed cell foam to secure cut edges in doorway, however they should be kept to a minimum. See Fig. 8 & 9.

Care must be taken at the design stage to ensure that fire stops are fitted to the same standard as that required for fire doors.



Fig. 8

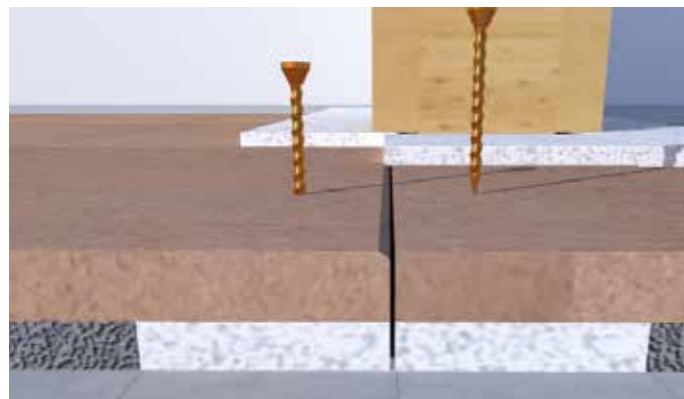


Fig. 9

7 SERVICES

It is imperative that all services are in place prior to laying the Profloor Micro Deck 17 panels. Services cannot be accommodated between Profloor Micro Deck 17 and the sub-floor.

Where access is required to services below the sub-floor, the Profloor Micro Deck 17 panel is cut to suit. Profloor Support Strips are placed around the perimeter of the opening formed and around the hatch. The Profloor Support Strips are positioned to support the the main floor panels and the hatch infill panel. See Fig. 10. A line of acoustic sealant should be caulked onto all the butt joints formed or alternatively, a proprietary support joint can be used.

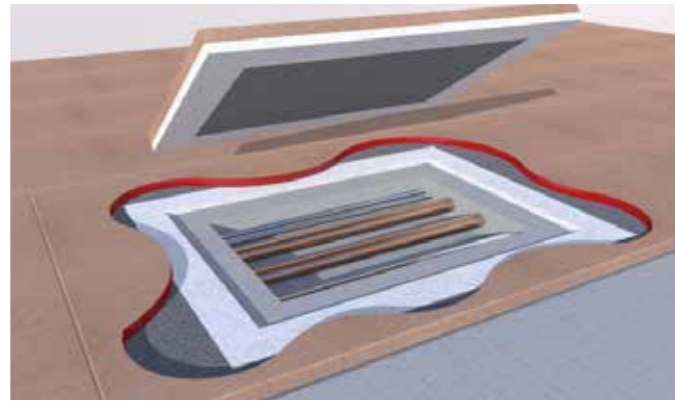


Fig. 10

8 SKIRTING BOARDS

Once the laying of the floor panels is completed, the Flanking/Support strip should be folded back onto the surface of the Profloor Micro Deck 17 panels, and weight applied to compress the system (the tradesman's weight is normally sufficient for this). The skirting boards can then be fixed in place to retain the flanking/support strip between the skirting between the panel surface and the skirting (see fig 11). The excess flanking/support strip can then be trimmed off flush with the skirting.

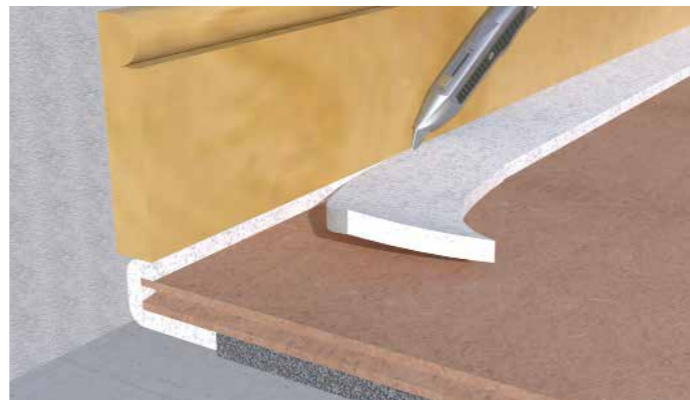


Fig. 11

9 PROTECTION OF FLOORING

To prevent damage from following trades, it is recommended that the finished floor is covered with an appropriate protective layer; such as BSK building paper or polythene, immediately after installation.

For more information contact us:

+44 (0) 1250 872261  
www.proctorgroup.com



CUST .....

QTY .....

LOT NO .....



**BEWARE**  
Packs/Boards exceeds 15Kg

Products **MUST NOT** be stacked  
Products must be kept dry **AT ALL TIMES**



## 1 BEFORE YOU START

Estimating Quantities/Required Materials:

- Micro Deck 17 panels 1200x600x17 (0.72m<sup>2</sup>)
- Micro Deck 17 Hi-Load Panels 1200x600x16 (0.72m<sup>2</sup>)
- 125x7mm Profloor Flanking/Support Strip (10m Rolls)
- Profloor Adhesive (60lin.m/l Coverage)

### Internal Walls

Internal walls and partitions, both load bearing and non-loadbearing, cannot be taken off the finished acoustic floor when using Profloor Deck Systems. All internal partitions should therefore be completed prior to the installation of the Profloor Micro Deck system.

## 2 PERIMETER SUPPORT & FLANKING ISOLATION

Profloor Micro Deck 17 panels must be supported at all perimeters. Support strips are factory fitted at tongue and groove joints however support strip to any cut edges must be fitted on site.

125mm x 7mm Profloor Flanking/Support strip is recommended for use with Micro Deck 17 Panels (other widths are available if required), supplied with or without 50mm wide double sided tape. This strip not only supports the board edges, but provides isolation of the finished floor surface from the structural subfloor beneath. This is essential for good acoustic performance.

At all perimeters or other cut board edges, a 50mm strip of foam should be removed from the underside of the Micro Deck 17 panel, and replaced with the Flanking/Support Strip, which is then folded around the board edge, as shown in figures 1-3. The Flanking/Support Strip should be fixed to the board using double sided tape.

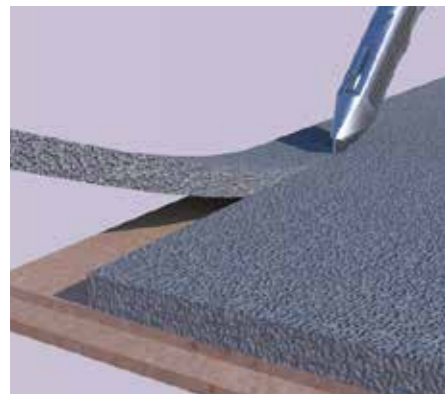


Fig. 1

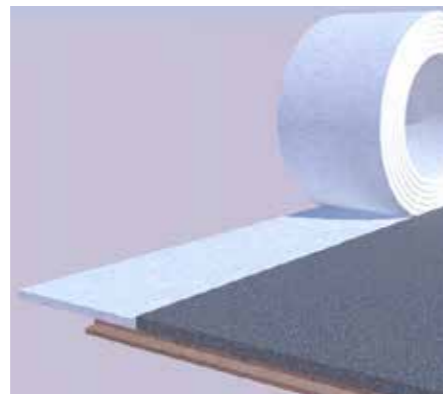


Fig. 2

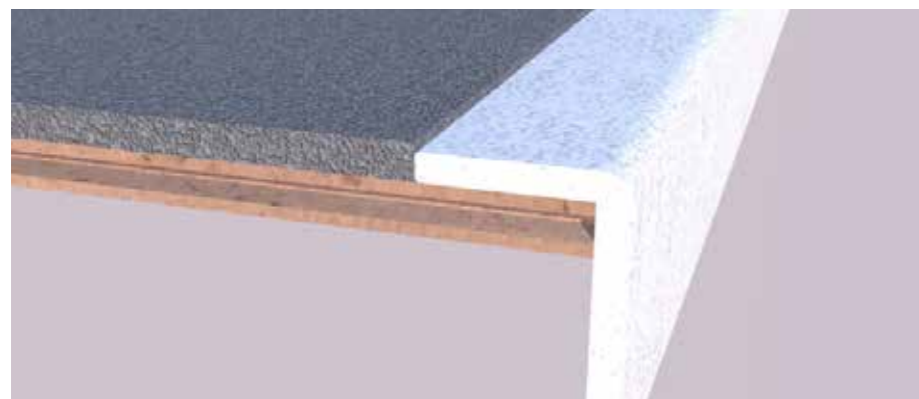


Fig. 3

## 3 INSTALLATION OF BOARDS

Commence laying Profloor Micro Deck 17 panels from the corner of the room furthest from the point of access. Flanking/Support strip should be attached to the perimeter boards prior to installation (see step 2) and boards laid along the full length of wall, with care taken to ensure the exposed edge is aligned to allow a straight joint for the next row of boards. See Fig. 4.



Fig. 4

When laying adjacent rows, board joints should be staggered by a minimum of 400mm, with full uncut boards used wherever possible. Offcut lengths of board may be used at the edges of each row, provided they are not less than 200mm in length and the 400mm stagger is maintained. See Fig. 5.

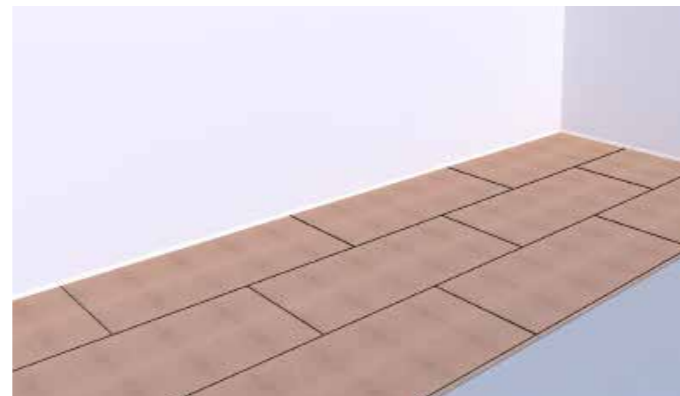


Fig. 5

## 4 EXPANSION OF FLOORING MATERIALS

Allow for the possible expansion of Profloor Micro Deck 17 panels by leaving a gap between the edge of the panels and the perimeter wall or other abutment. This gap should be 1mm per linear metre run of flooring panels, and should never be less than 10mm. For longer runs such as hallways, intermediate expansion gaps may be required.

If required, wedges or packing pieces may be used to ensure this gap is maintained, however if used, these MUST be removed prior to the fixing of skirting boards.

The rate of expansion/contraction of the boards will depend on the moisture content of the boards at time of installation, laying conditions and length of runs. Boards should be conditioned in the environment in which they will be used prior to installation, and it is advisable that installers familiarise themselves with the recommendations of **BS8201: Code of Practice for flooring of timber, timber products and wood based panel products.**

## 5 FIXING OF PANELS

Mechanical fixings must not be used to secure Profloor Micro Deck 17 panels to the subfloor, as this will compromise the acoustic performance of the panels.

The tongue and groove edges of the panels should be jointed using a nominal 5mm bead of Profloor Adhesive applied in the groove (coverage approx. 60lin.m/litre). Any surplus adhesive should be immediately removed with a damp cloth. See Fig. 6.

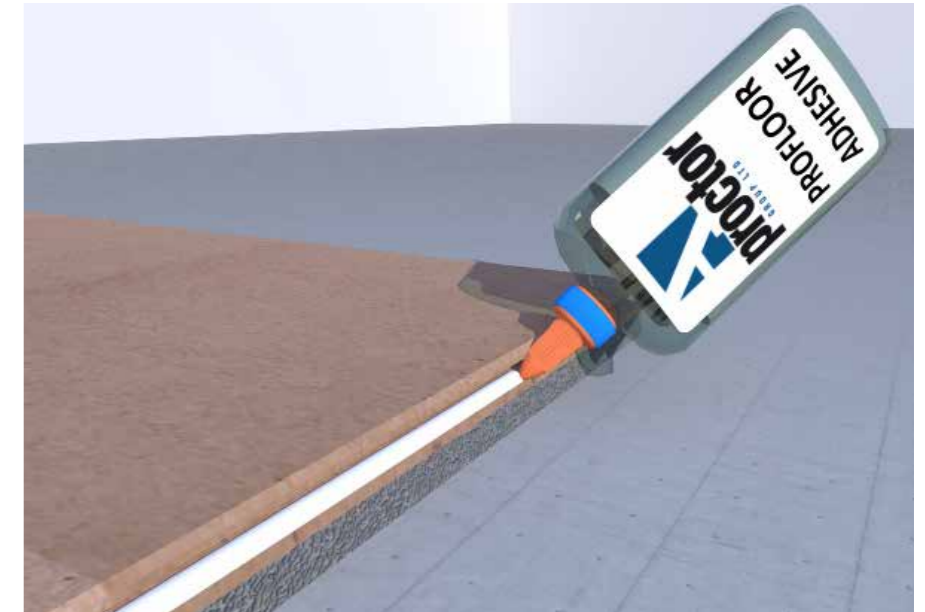


Fig. 6

### Call our Technical Department

The A. Proctor Group has a dedicated Technical Department which can assist with installation details, view drawings for approval and give specialist advice on the correct use of the A. Proctor Group products.

For Technical Advice on installation details and product applications contact the A. Proctor Tecline:

Telephone  
**01250 872261**

Facsimile  
**01250 872727**

Email  
[contact@proctorgroup.com](mailto:contact@proctorgroup.com)