

PRODUCT DATASHEET

RPF Fixed Head Adjustable Paving Pedestal

The RPF fixed head adjustable pedestal is designed to support all conventional paving and decking systems.

SUPPORT HEAD

- Supports paving slabs
- Connection design allows for easy adjustment of pedestal height once paving has been laid

SPACER TABS

- Provide consistent spacing between slabs
- Pre-installed snap-off design allows for easy removal as required.

ADJUSTABLE THREADED SECTION


- Allows millimetre perfect adjustment within given range
- High loading capability

HEIGHT EXTENSION COLLAR


- Adds 126mm of height
- Enables incremental height build-up as required.

SUPPORT BASE

- Evenly spreads load
- Protects membranes

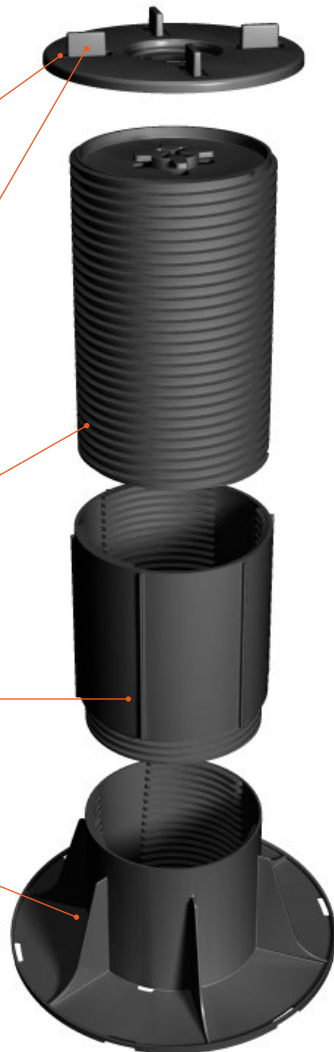

ACCESSORIES



BRSP
3mm rubber shock pad for pedestal base
part no: 50.1001



HRSP for RPF
2mm moulded rubber shockpad for RPF pedestal
part no: 50.1008



Edge Spring Clip
Tensions tile bed, counteracts creepage and ensures uniform spacing against wall abutment
part no: 50.0018



TECHNICAL SPECIFICATION

Product material	PP Polypropylene (recyclable), UV resistant		
Biological/chemical	Resistant to moulds, algae, alkali, bitumen		
Height range	RPF-1 22-35mm RPF-2 35-55mm RPF-3 55-95mm RPF-4 95-165mm	RPF-5 165-235mm RPF-6 200-270mm RPF-7 260-340mm RPF-8 305-375mm	RPF-9 365-445mm RPF-10 410-480mm RPF-11 470-550mm
Compression	1000kg		
Base diameter	200mm		
Head diameter	120mm		
Spacer tab thickness	2mm / 4mm (standard) / 6mm / 8mm / 10mm		
Working Temperature	-40°C to 120°C		



Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk