



# introducing DAVINCI SELECT SHAKE

**DaVinci's Select Shake roofing provides the craftsmanship and authenticity of natural, hand-split cedar shake but without the ongoing maintenance and upkeep of wood. Make your dream home a reality today with Select Shake!**


- Fully tested to BBA Standards, including fire, wind, driven snow & rain, and water absorption
- Easy to install with pre-marked nailing guides
- Lightweight – as low as 14kg per m<sup>2</sup>
- Easily cut with a sharp utility blade or fine-toothed saw
- No sorting, clipping or drilling, can be fixed direct to roof, out-of-the-pack
- A choice of 3 amazing colours stocked in the UK to add even more exclusivity to your home or project
- Overall cost saving over traditional cedar roofing, as well as longer lifespan and minimal maintenance
- No breakages – will not crack, split or break if dropped or walked upon
- Low 15° pitch
- 40-year, transferable, extended warranty
- Resistant to fading, rotting, cracking, and pests
- Authentic cedar shake appearance – combines the beauty of cedar with modern technology




*DaVinci Select Shake is created from authentic wood profiles making it the most realistic roofing product on the market.*

# Timeless beauty for every home


IF YOU'RE LOOKING FOR A WORRY-FREE, BEAUTIFUL, BEST-IN-CLASS ROOF THAT CAN WITHSTAND ANY STORM, LOOK NO FURTHER THAN DAVINCI

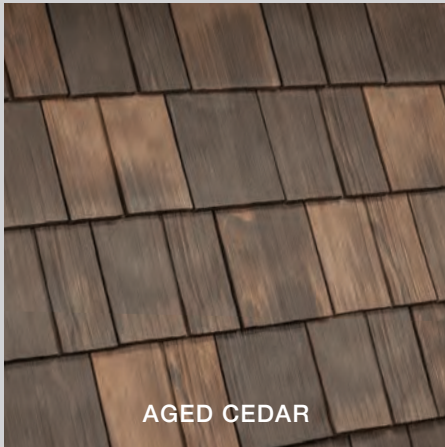

AGED CEDAR

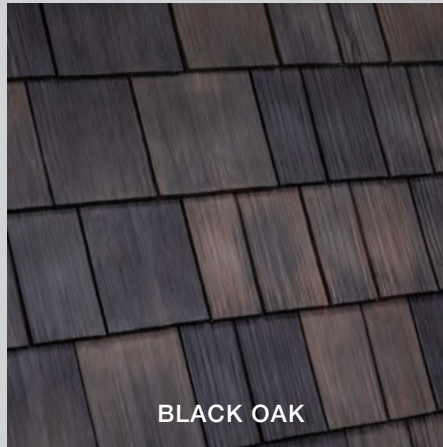

BLACK OAK

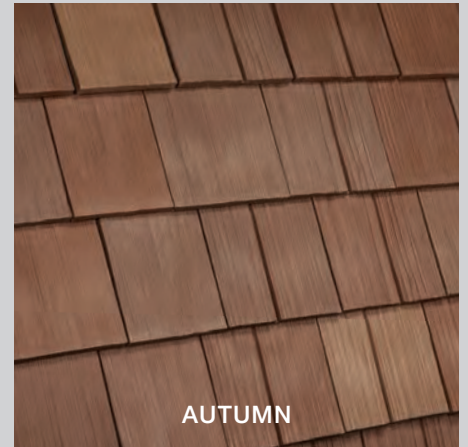


AUTUMN

## A choice of 3 amazing colour finishes

These colours are stocked in our UK warehouse for dispatch today! Standard delivery is 3-to-5 days, enhanced delivery is also available (for an extra cost) at 1-to-2 days: Note that printed colours may not be representative, always use actual samples for colour choice, visit [www.tapcoroofingproducts.com](http://www.tapcoroofingproducts.com) or email: [info@tapcoslate.com](mailto:info@tapcoslate.com)




### SELECT SHAKE

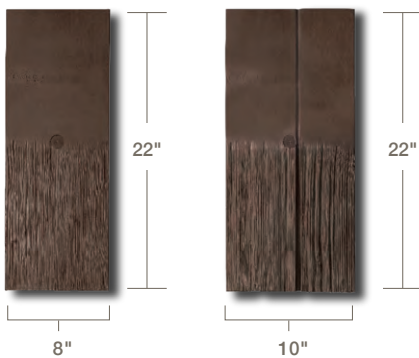

Finished look creates the appearance of 4", 6", 8", and 10" wood shakes

### STARTER TILES

Starter (or Eaves) Tiles **MUST** be fitted. 3.5 tiles per linear metre



### RIDGE & HIP CAPS

Universal fit for both ridge and hip!



MINIMUM cap exposure (measured from front of cap) should be set at 12" (305mm)

### Coverage

<b>PITCH:</b>	15° to 70°
<b>EXPOSURE:</b>	Straight Tile Effect Min. 9" (230mm) Staggered Tile Effect Min. 10" (254mm)
<b>SHAKE M<sup>2</sup>:</b>	20 Shake Tiles per Square Metre
<b>CAPS M<sup>2</sup>:</b>	3.3 Ridge/Hip Caps per Linear Metre

### Ratings & Certification

TESTING	FINDINGS	TESTING	FINDINGS
Fire Rating:	BS EN 13501-5 : 2016 B <sub>ROOF</sub> (t4)	Freeze/Thaw Cycle:	No damage or cracking after 300 cycles.
Hail Rating:	Class 4 UL 2218.	Water Absorption:	No appreciable weight gain.
Wind-driven Rain/Uplift:	BRE EN 15601 & Miami Dade TAS-110 (110mph).	Water Permeation:	Impermeable.
Accelerated UV Exposure:	ASTM G 155-13, 5000 hours Xenon Arc.	Temperature Cycling:	No cracking, deformation or expansion.